USER MANUAL
& HYGIENE RECOMMENDATION
FOR PROFI WATER COOLERS

SETTING UP PROFI 15 – PROFI 90 WATER COOLERS

(ATTENTION: follow the correct sequence! O_2 or CO_2 connection depending on the cooler type!)

1. Connect the water pipe to the water cooler, check for any leaks and keep the water tap closed.
2. Connect the power supply and open the water tap.
3. Initial installation of gas bottle(s)

O_2 bottle (oxygen)	CO_2 bottle (carbon dioxide)
Connect the O_2 bottle, then open the valve and adjust the pressure on the pressure gauge wheel with the notch at 0.05 l/min. After opening, wait for 2-3 minutes until the cooling generator stops running.	Connect the CO_2 bottle, open the valve and adjust the pressure to 2.8 bar. The pressure may fall slightly over the next two days, in which case it needs to be readjusted. The carbon dioxide level will be properly adjusted by our service technician during setup.

4. The first few litres of water drawn are not suitable for consumption, as they do not yet contain the full oxygen or carbon dioxide level.

OVERVIEW OF OPERATING BUTTONS

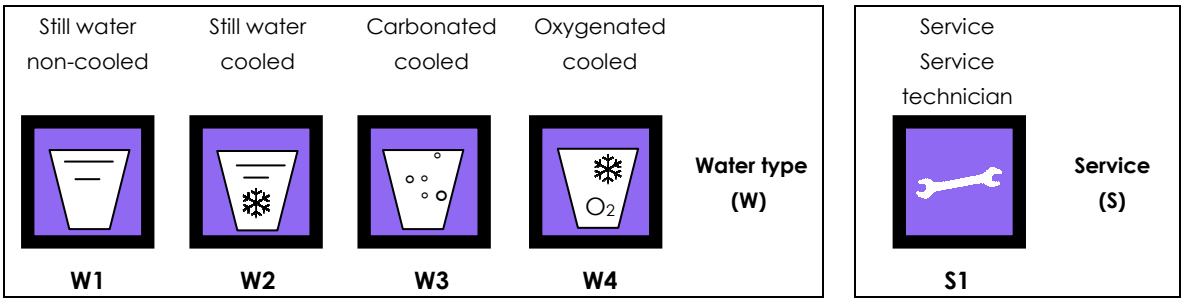

CHANGING GAS BOTTLES

Changing the carbon dioxide bottle (CO_2)

1. Close the valve on the CO_2 bottle.
2. Press and hold the W3 water type button (carbonated cooled) until the pressure gauge reads zero. This releases the pressure, allowing the pressure regulator valve to be unscrewed from the CO_2 bottle using the supplied spanner.
3. Screw the pressure regulator on the new CO_2 bottle and tighten with the supplied spanner.
4. Open the regulator on the CO_2 bottle.
   Attention: do not change the setting on the front adjuster (2.8 bar basic setting), since this will alter the carbon dioxide and water balance!
5. Check for a tight seal: close the regulator on the CO_2 bottle and wait 1 minute. If the pressure gauge reading remains constant, the connection is tight. Reopen the CO_2 bottle valve.
6. Dispense 2-3 litres of carbonated water.
7. The water cooler is ready to use.

CHANGING O_2 BOTTLE & HYGIENE RECOMMENDATION ➤➤➤

Oxymount AG
Tödistrasse 53
CH-8810 Horgen
Phone +41 (0)44 783 86 66
Fax +41 (0)44 783 86 67
info@oxymount.ch
www.oxymount.ch

USER MANUAL (CONTINUED)

Changing the oxygen bottle (O_2)

1. Close the valve on the O_2 bottle.
2. Press and hold the W4 water type button (oxygenated cooled) until the pressure gauge reads zero. This releases the pressure, allowing the pressure regulator valve to be unscrewed from the O_2 bottle without any tools.
3. Screw the pressure regulator valve on the new O_2 bottle and hand tighten.
4. Open the valve on the O_2 bottle.
   Attention: do not change the setting on the front adjuster (0.05 l/min basic setting).
5. Check for a tight seal: after at least 30 seconds with the O_2 infeed open, close the valve on the O_2 bottle and wait 1 minute. If the pressure gauge reading remains constant, the connection is tightly sealed. Reopen the regulator on the O_2 bottle.
6. Dispense 2-3 litres of oxygenated water.
7. The water cooler is ready to use.

HYGIENE RECOMMENDATION

1. The customer is responsible for the hygiene and cleanliness of the installed water coolers. We recommend regularly cleaning the outer surface.

2. Water dispenser – cleaning frequency
   a. Wipe down the water cooler and the drip tray daily with a single-use cloth and empty the drip tray if necessary.
   b. The water outlet must be disinfected every 2 days with a hygiene spray (food compatible). Point the spray at the water outlet, spray and allow around 2 minutes to take effect, then draw around 0.5 litres water to rinse.
   c. The blue protective cap needs to be cleaned every 1 or 2 weeks. The service technician will instruct the people responsible for the water cooler in the method of cleaning. The blue protective cap must not be removed. Wet the single-use cloth with the spray, then carefully and effectively clean all grooves and indentations in the protective cap.

3. If the water cooler is not used over the weekend or during public holidays, we recommend the following procedure before using it again:
   - disinfect the outlet (as described in point 2b).
   - draw off 2 litres of water (distributed through the various water options) and throw away: the water is now suitable for drinking
   - if the water cooler is to be left unused for a longer period (holidays etc. for 14 days and longer), please inform the Oxymount Service Centre (Tel. +41 (0)44 783 86 66) in plenty of time beforehand.

4. Water bottle hygiene
   a. When drawing water, do not hold or press the water bottle against the water cooler outlet. Always place the drinking bottle on the drip tray and press the CO_2, O_2 or still water button.
   b. Pour any remaining water out of the drinking bottle in the evening.
   c. Leave the clip fastener open overnight to allow the bottle to dry out.
   d. Do not mix any sweeteners in the drinking bottle.
   e. Wash out the drinking bottle with hot water before the weekend.
   f. Spare rubber seals are available for the bottle clip fastener to replace worn seals.

Oxymount AG
Tödistrasse 53
CH-8810 Horgen
Phone +41 (0)44 783 86 66
Fax +41 (0)44 783 86 67
info@oxymount.ch
www.oxymount.ch